

**Woertz AG**  
Hofackerstrasse 47  
CH-4132 Muttenz  
Tel. 061/ 466 33 33  
Fax 061/ 466 33 31  
E-mail [elektronik@woertz.ch](mailto:elektronik@woertz.ch)  
Internet [www.woertz.ch](http://www.woertz.ch)

## Features

- 3-wire potentiometer / 0-10V converter
- Not isolated (common negative terminal)
- Integrated low-pass filter suppresses disturbance
- Output over voltage and short-circuit protected
- Wide supply voltage range
- Wide range of potentiometers
- LED power indication
- On request: 2-wire version, higher accuracy, wider temperature range

## Accessories

- 30407T End barrier
- 30403 Compatible 3-level terminal
- 30413RO Cross connection 20-pole red
- 30413BL Cross connection 20 -pole blue
- 30790 Cross connection 10-pole grey
- 30409/x Cross connection with screws x = 2, 3, 4, 5, 10 poles
- 30411, 12 Isolation strip, red, blue
- 80247, 48 Test plug red, black
- 30455/55xx Labels for custom use RB/5x5

## Technical data (T<sub>a</sub>=25°C)

### Supply

Power supply range  
Supply current (without load)

### Converter

Potentiometer range

### Output



Conversion error  
Minimum load  
Low-pass filter  
Output protection  
Reference voltage for potentiometer

### General data

Operating temperature range  
Wire cross-section  
Maximum torque  
Size L x W x H (from rail)

### Order number

3-wire potentiometer / 0-10V converter

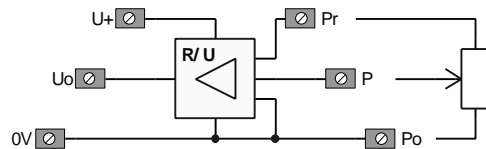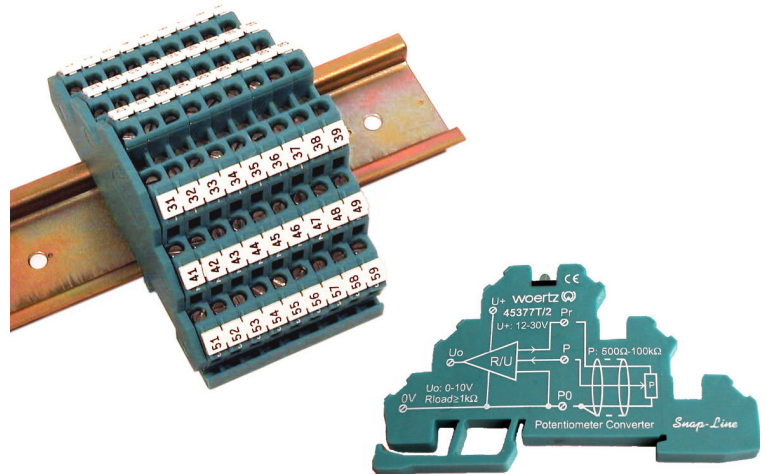

12-30VDC  
ca. 40mA (at U<sub>+</sub>=24V)  
ca. 30mA (at U<sub>+</sub>=12V)

500Ω-100kΩ  
(higher resistance possible with lower accuracy)

0-10V  
<0.5% (50mV)

1kΩ

ca. 10Hz

ca. 11V

5V

0°C to +45°C  
2.5mm<sup>2</sup> (AWG24-14)

0.4Nm

5.08 x 86.5 x 44mm

**45377T/2**